

Installation and Maintenance Information



// Thank you for choosing the Defender HFR100 battery operated alarm.

Units should be tested in accordance with your risk assessment by a responsible person. //




Wall or post mounting

The Defender alarm has four moulded depressions in the back mounting plate. These 4 points should be drilled to take a No 6 screw. Mark on your post or wall a suitable height to mount. We recommend a minimum height of 130cm. Make sure the unit can be seen above any obstructions and is placed in a sufficient lighted area. Fix the back plate to your mounting point using screws and washers (please note that the upright position is marked on the reverse of the back moulding plate)

Linking instructions

Up to 25 Defender HFR100 models can be linked in parallel using a suitable twin core bell wire. + and - terminals should be linked from each unit through the screw terminals as detailed in the illustration below. (Please check polarities with a DC meter before connection is made)

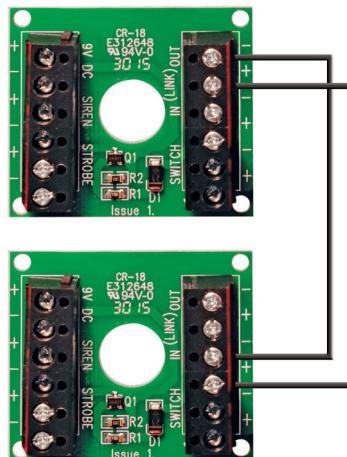

Changing the battery

1. Detach the front cover from the unit by removing the bottom screw (No 2 Phillips Screwdriver) from the red siren/strobe unit.



Note: DO NOT use battery powered screwdriver as this will damage the flasher lens and void your warranty

2. Remove the PP3 clip from the battery.
3. Slide the battery from underneath the black plastic strap and replace the battery and then replace the front cover.



Note: Please remember to test the unit immediately after replacing the battery.

Product maintenance

We recommend the Defender HFR100 is tested weekly and the PP3 battery replaced every 12 months using zinc or alkaline batteries. To clean the product use a damp cloth on the external of the unit.

Damaged units

Physical damage to the Defender HFR100 should be taken seriously. Any damage to the external casing can result in the product not operating as required, if this is the case we recommend replacing the product.

Product application and conditions of sale

It is at the discretion of the user to determine the suitability and application of this product before use. If you are not completely satisfied that this product is suitable for your application or use please return the product immediately to your place of purchase in an unused condition and in its original packaging along with your proof of purchase. This product must not be modified. Modification in any form will void the warranty and may impair the operation of the product.

Defender HFR100 3 month limited warranty

This warranty is limited to the original purchaser and is not transferable. REPAIR OR REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS THE EXCLUSIVE REMEDY OF THE PURCHASER.

This warranty covers only these products purchased from an authorized Defender dealer. Third party transactions are not covered by this warranty. Proof of purchase is required for warranty claims.

Available exclusively at **Enfield**
Safety. Delivered.



Visit www.enfieldsafety.co.uk
Call now on **0333 003 5710**

